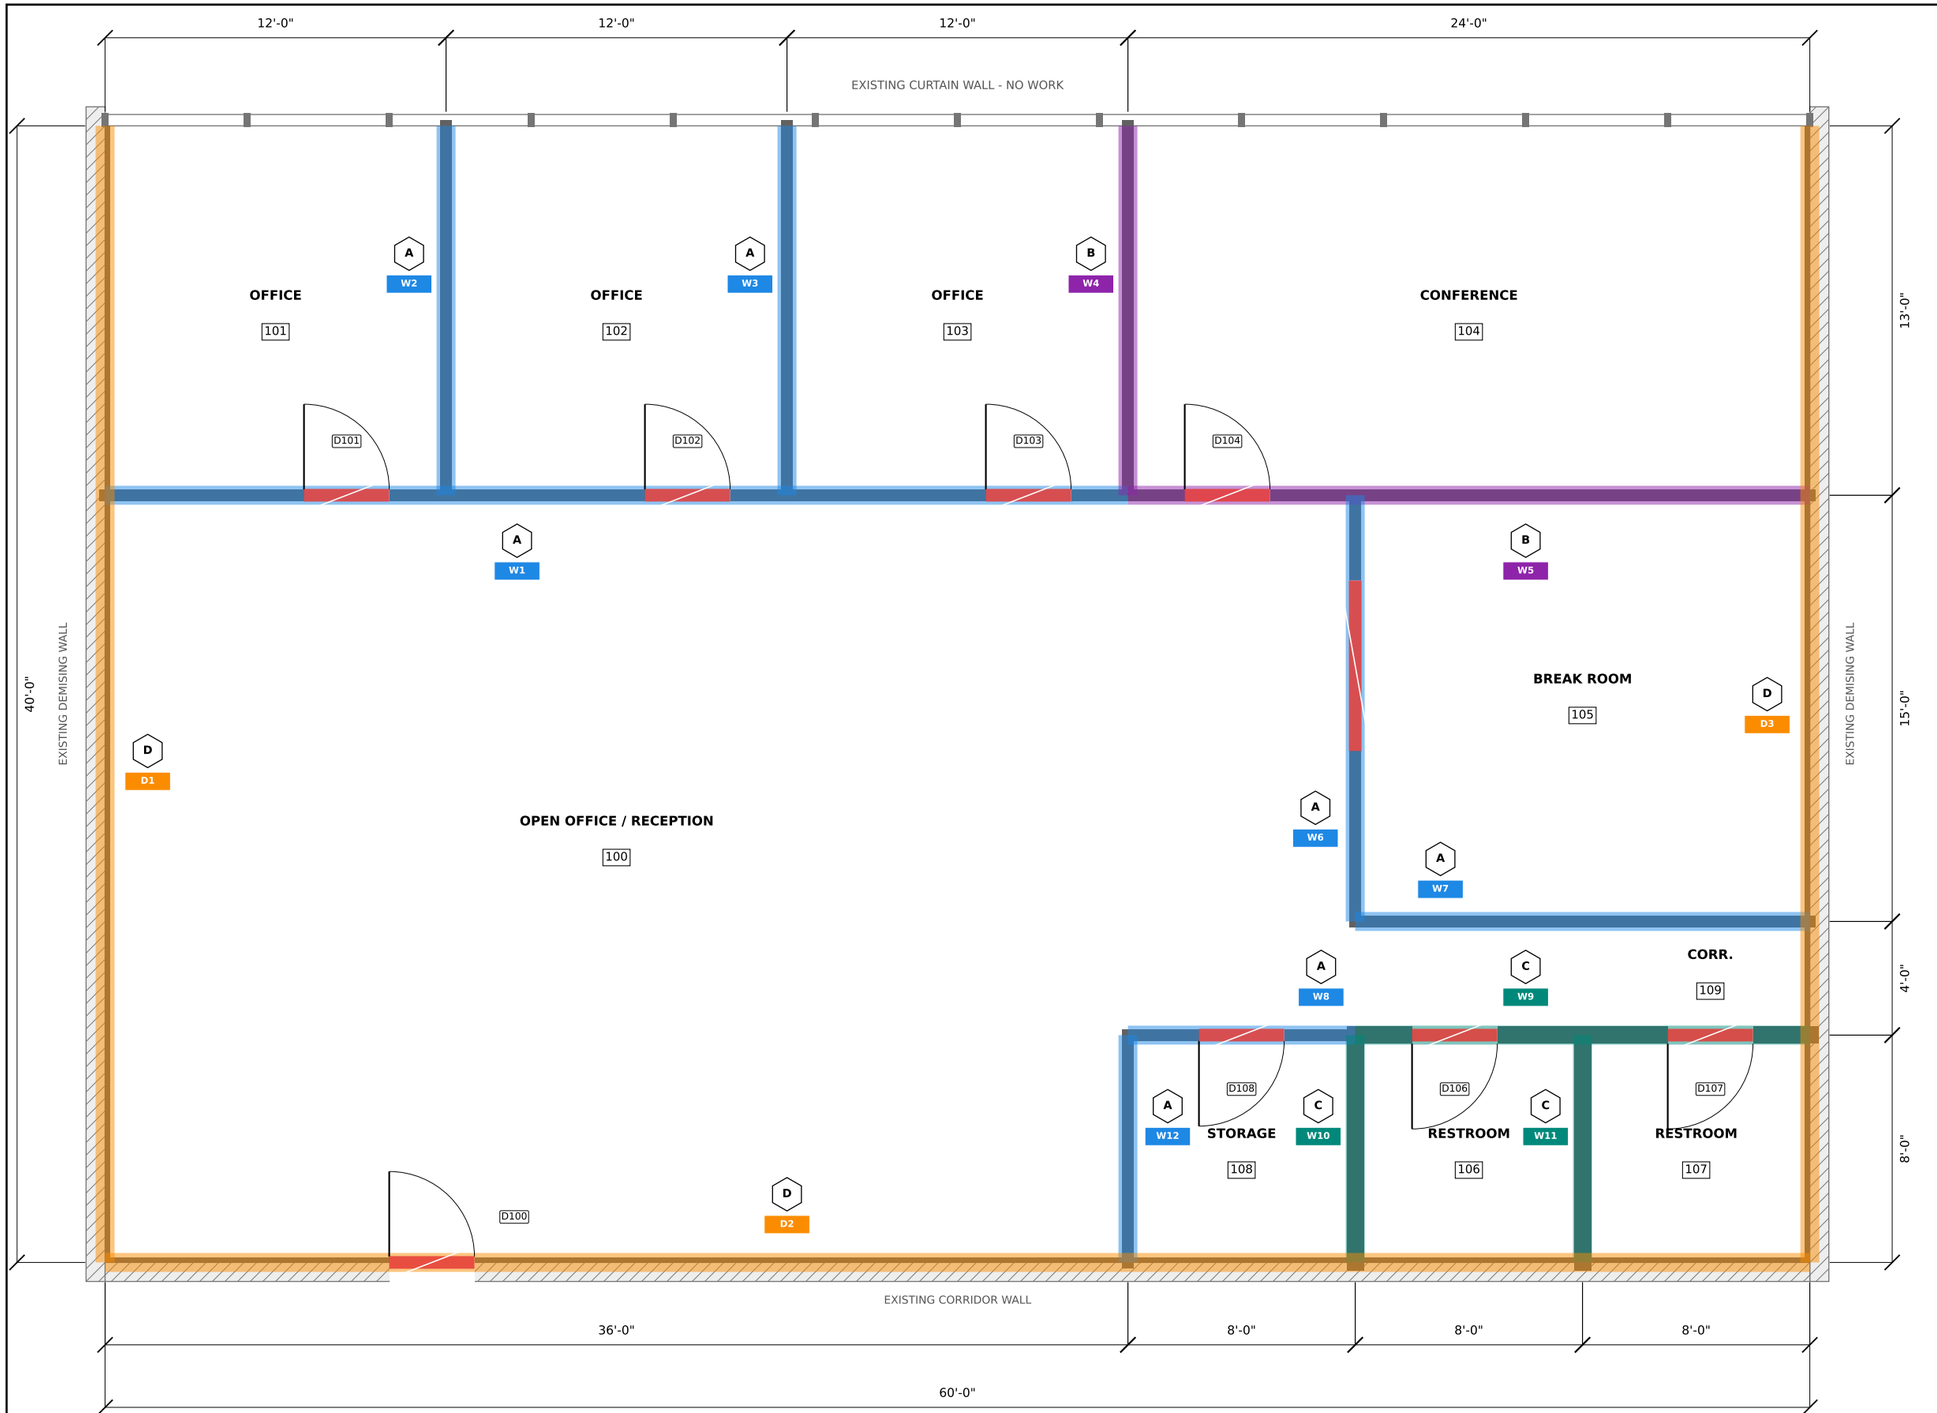


1 A-101

PARTITION PLAN

SCALE: 3/16" = 1'-0"

TAKEOFF LEGEND - PARTITIONS

TYPE	LF	NET GWB SF	RUNS
TYPE A	109	1,819	W1-3, W6-8, W12
TYPE B	37	920	W4-5
TYPE C	32	748	W9-11
TYPE D	140	1,799	D1-3
TOTAL	**318**	**5,286**	

Opening deducted (both faces), 9 no.


MEASUREMENT NOTES

1. Partition lengths along centerlines, wall to wall.
2. GWB SF = length x height x faces, less openings.
3. Type A to 9'-6" (6" above ceiling), B / C / D to deck 13'-0".
4. Studs = length / spacing + 1, plus 2 per opening.
5. Track = top + bottom + 1'-0" header per opening.
6. Run IDs (W1...D3) match the Excel takeoff.
7. Quantities: Drywall_Takeoff_Suite_210.xlsx

PROJECT	**SUITE 210 - TENANT FIT-OUT**
	PORTFOLIO SAMPLE
SHEET	**PARTITION PLAN**
DRAWN	S. GRISHUTOV (SAMPLE SET)
SCALE	3/16" = 1'-0" @ 11x17
DATE	NOV 2026

TAKEOFF MARKUP

A-101-M

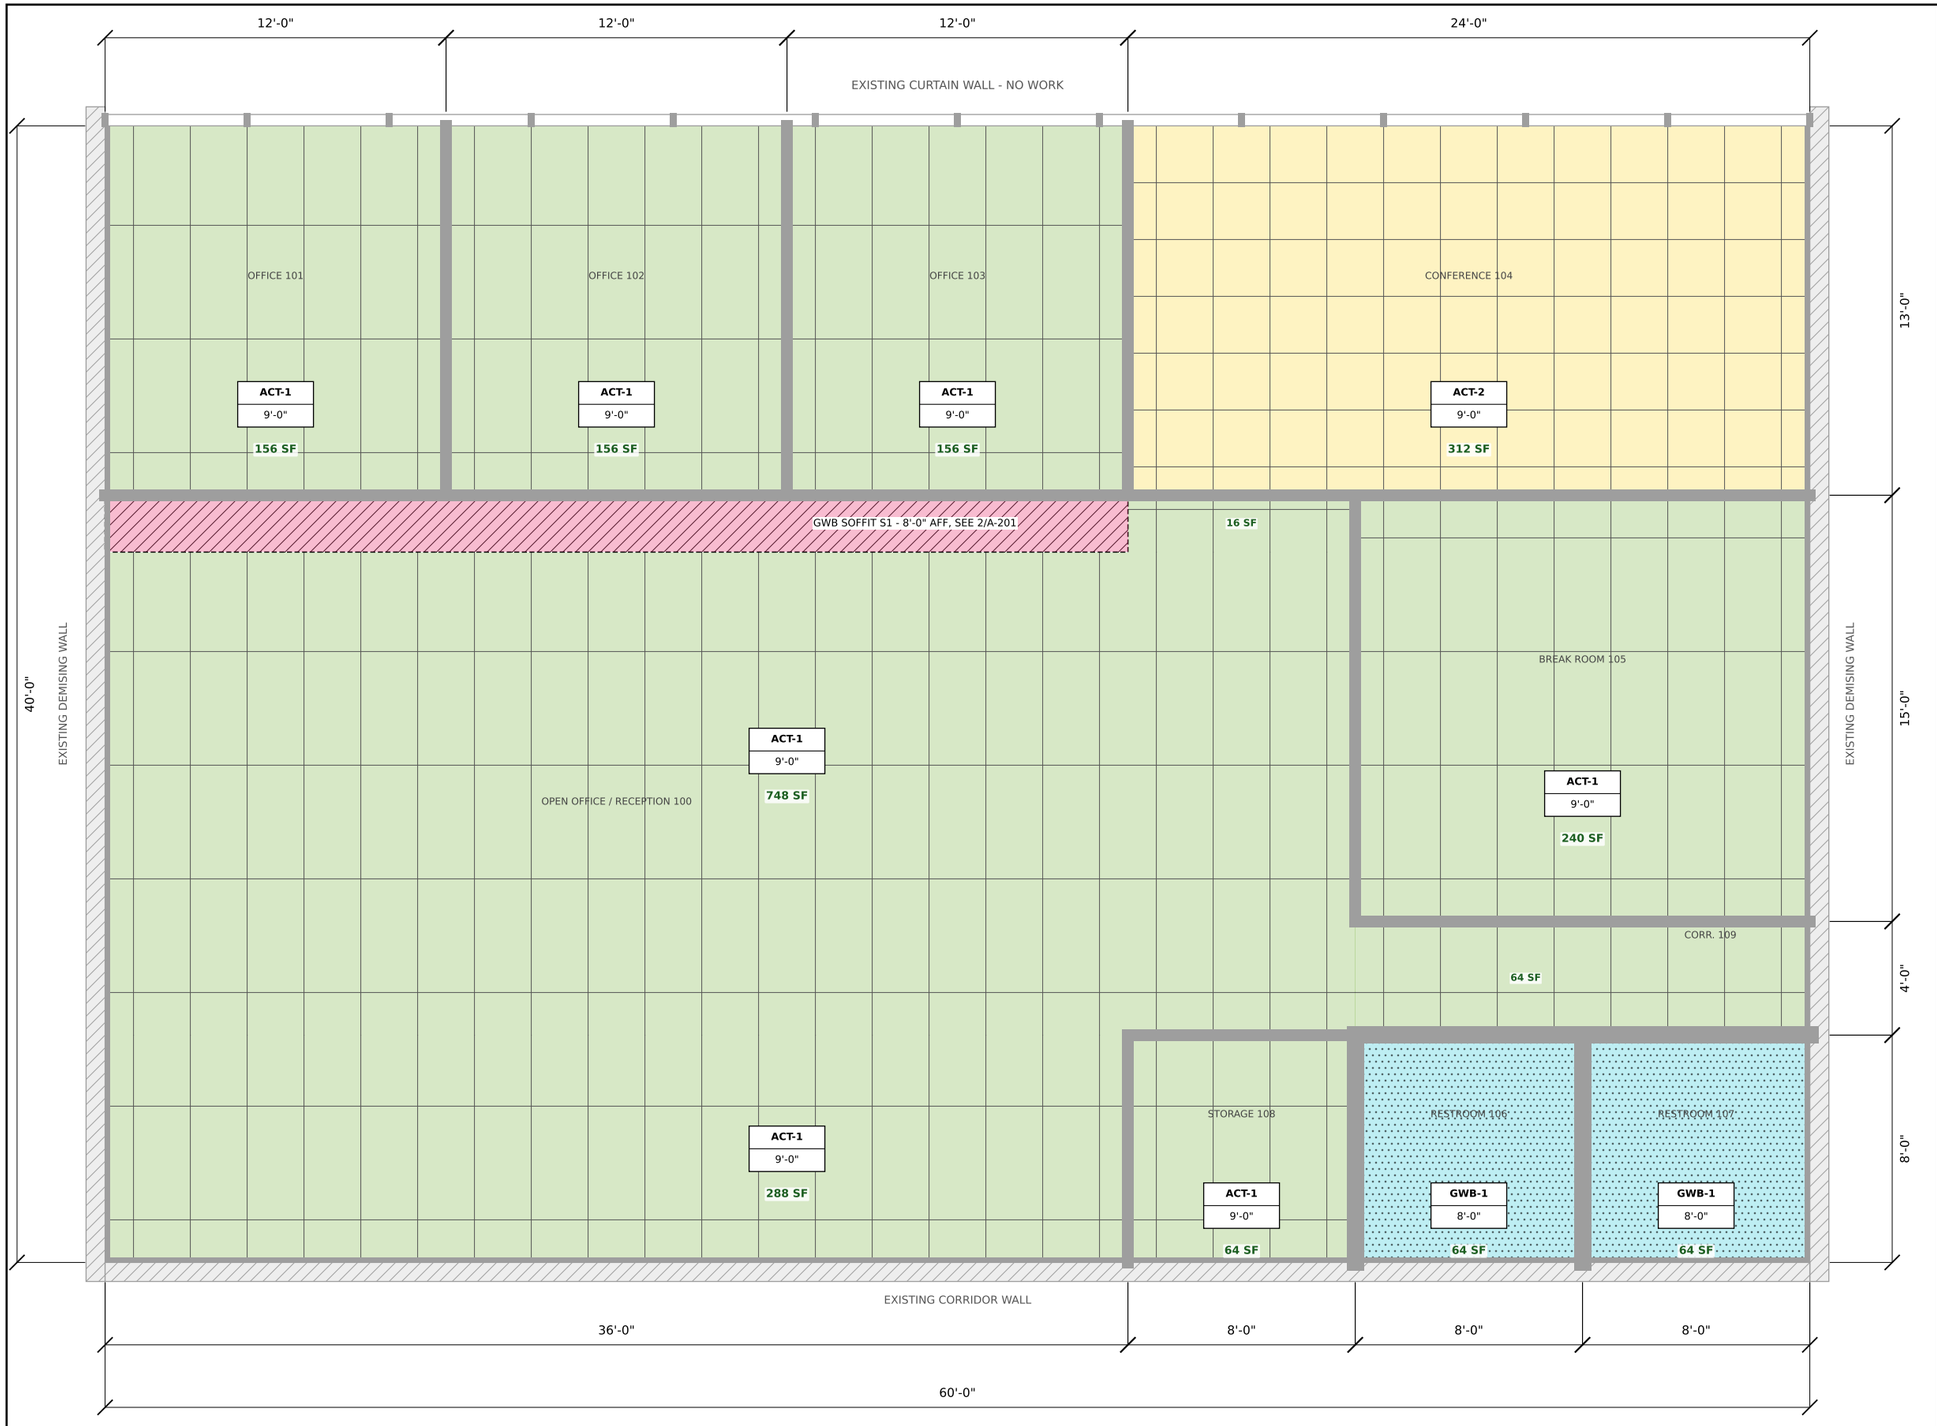

1 / A-201

REFLECTED CEILING PLAN

SCALE: 3/16" = 1'-0"

N

TAKEOFF LEGEND - CEILINGS

ACT-1	2' X 4' ACOUSTIC CEILING TILE ON 15/16" EXPOSED GRID	**1,888 SF**
ACT-2	2' X 2' ACOUSTIC CEILING TILE ON 15/16" EXPOSED GRID	**312 SF**
GWB-1	5/8" MOISTURE-RESISTANT GWB ON DRYWALL SUSPENSION GRID	**128 SF**
GWB-2	5/8" TYPE X GWB SOFFIT ON DRYWALL SUSPENSION GRID	**110 SF**

MEASUREMENT NOTES

1. Areas to partition centerlines, room by room.
2. ACT area excludes soffit S1 (72 SF).
3. Grid: mains 4'-0" o.c., 4' cross tees 2'-0" o.c.,
   2' cross tees in ACT-2, hangers 4'-0" o.c.
4. Wall angle along walls only, not at open edges.
5. Soffit S1: underside 72 + faces 38 SF, bead 38 LF.
6. Quantities: Drywall_Takeoff_Suite_210.xlsx

PROJECT	**SUITE 210 - TENANT FIT-OUT**
	PORTFOLIO SAMPLE
SHEET	**REFLECTED CEILING PLAN**
DRAWN	S. GRISHUTOV (SAMPLE SET)
SCALE	3/16" = 1'-0" @ 11x17
DATE	NOV 2026

TAKEOFF MARKUP

A-201-M