

Sample painting takeoff - drawing used and sample scope

Source: MBIE "Guide to applying for a building consent" (public sample drawings). Sheet A02 Rev A Floor Plans, 1:100.
Note: other sheets in the guide (A01 site plan job 0712, A05 elevations job 07123, Section sheet - Christchurch house) belong to different projects - so only A02 was used and all heights are assumed (flagged in the Excel, questions Q1-Q4).

Sample only

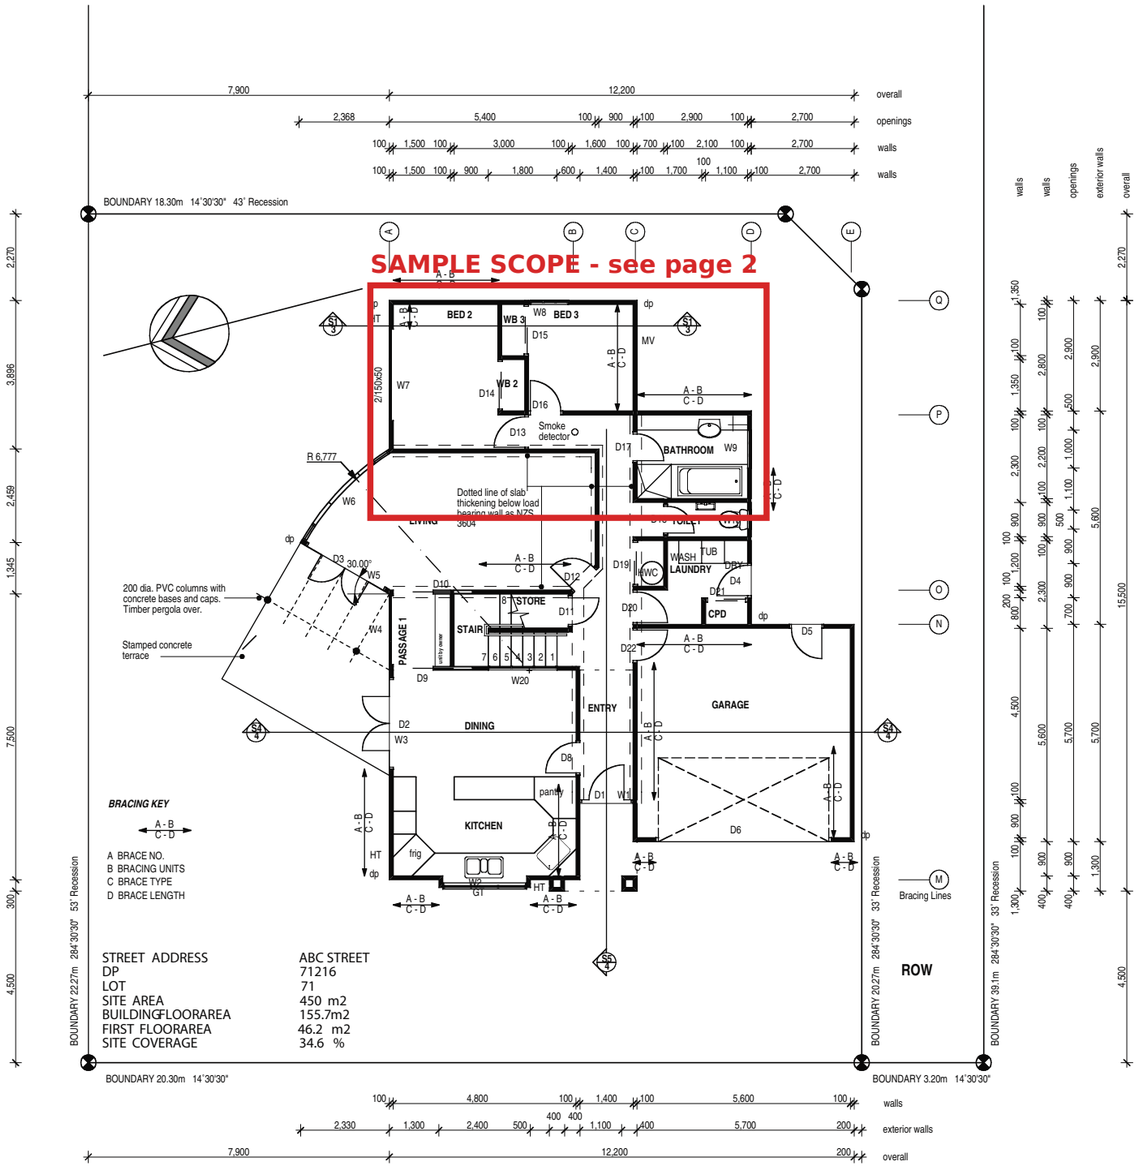

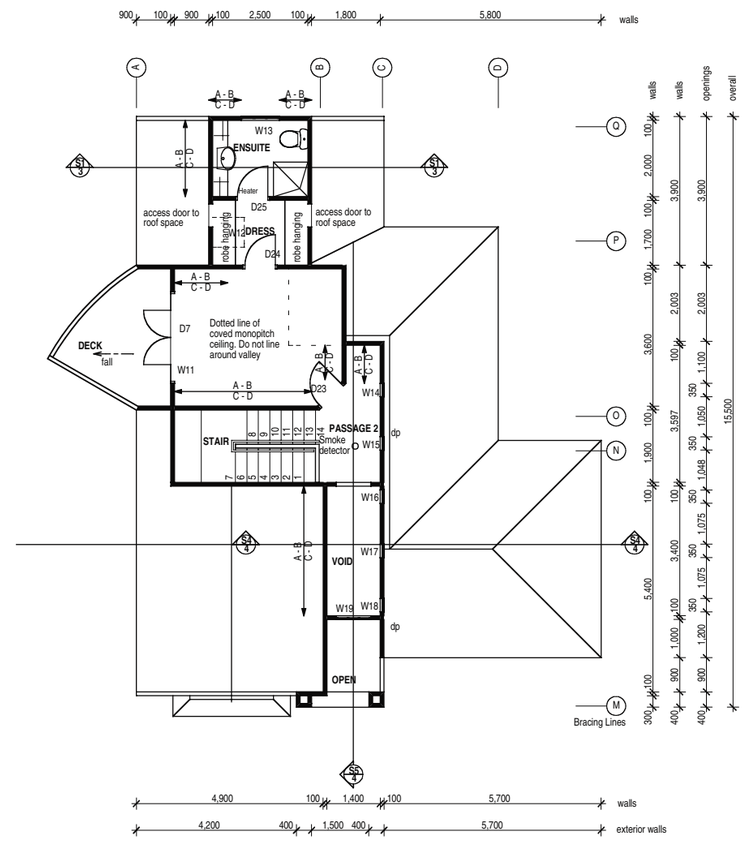

CLIENT

CONTRACTOR

CONSULTANTS

PROPOSED NEW DWELLING
ABC STREET


FLOOR PLANS

SCALE	
DATE	28 February 06
JOB No.	0666
DRAWN	
CHECKED	
STATUS	Consent
DRAWING No.	REVISION
A02	A

22 ABC STREET

GROUND FLOOR PLAN
Scale 1:100

FIRST FLOOR PLAN
Scale 1:100

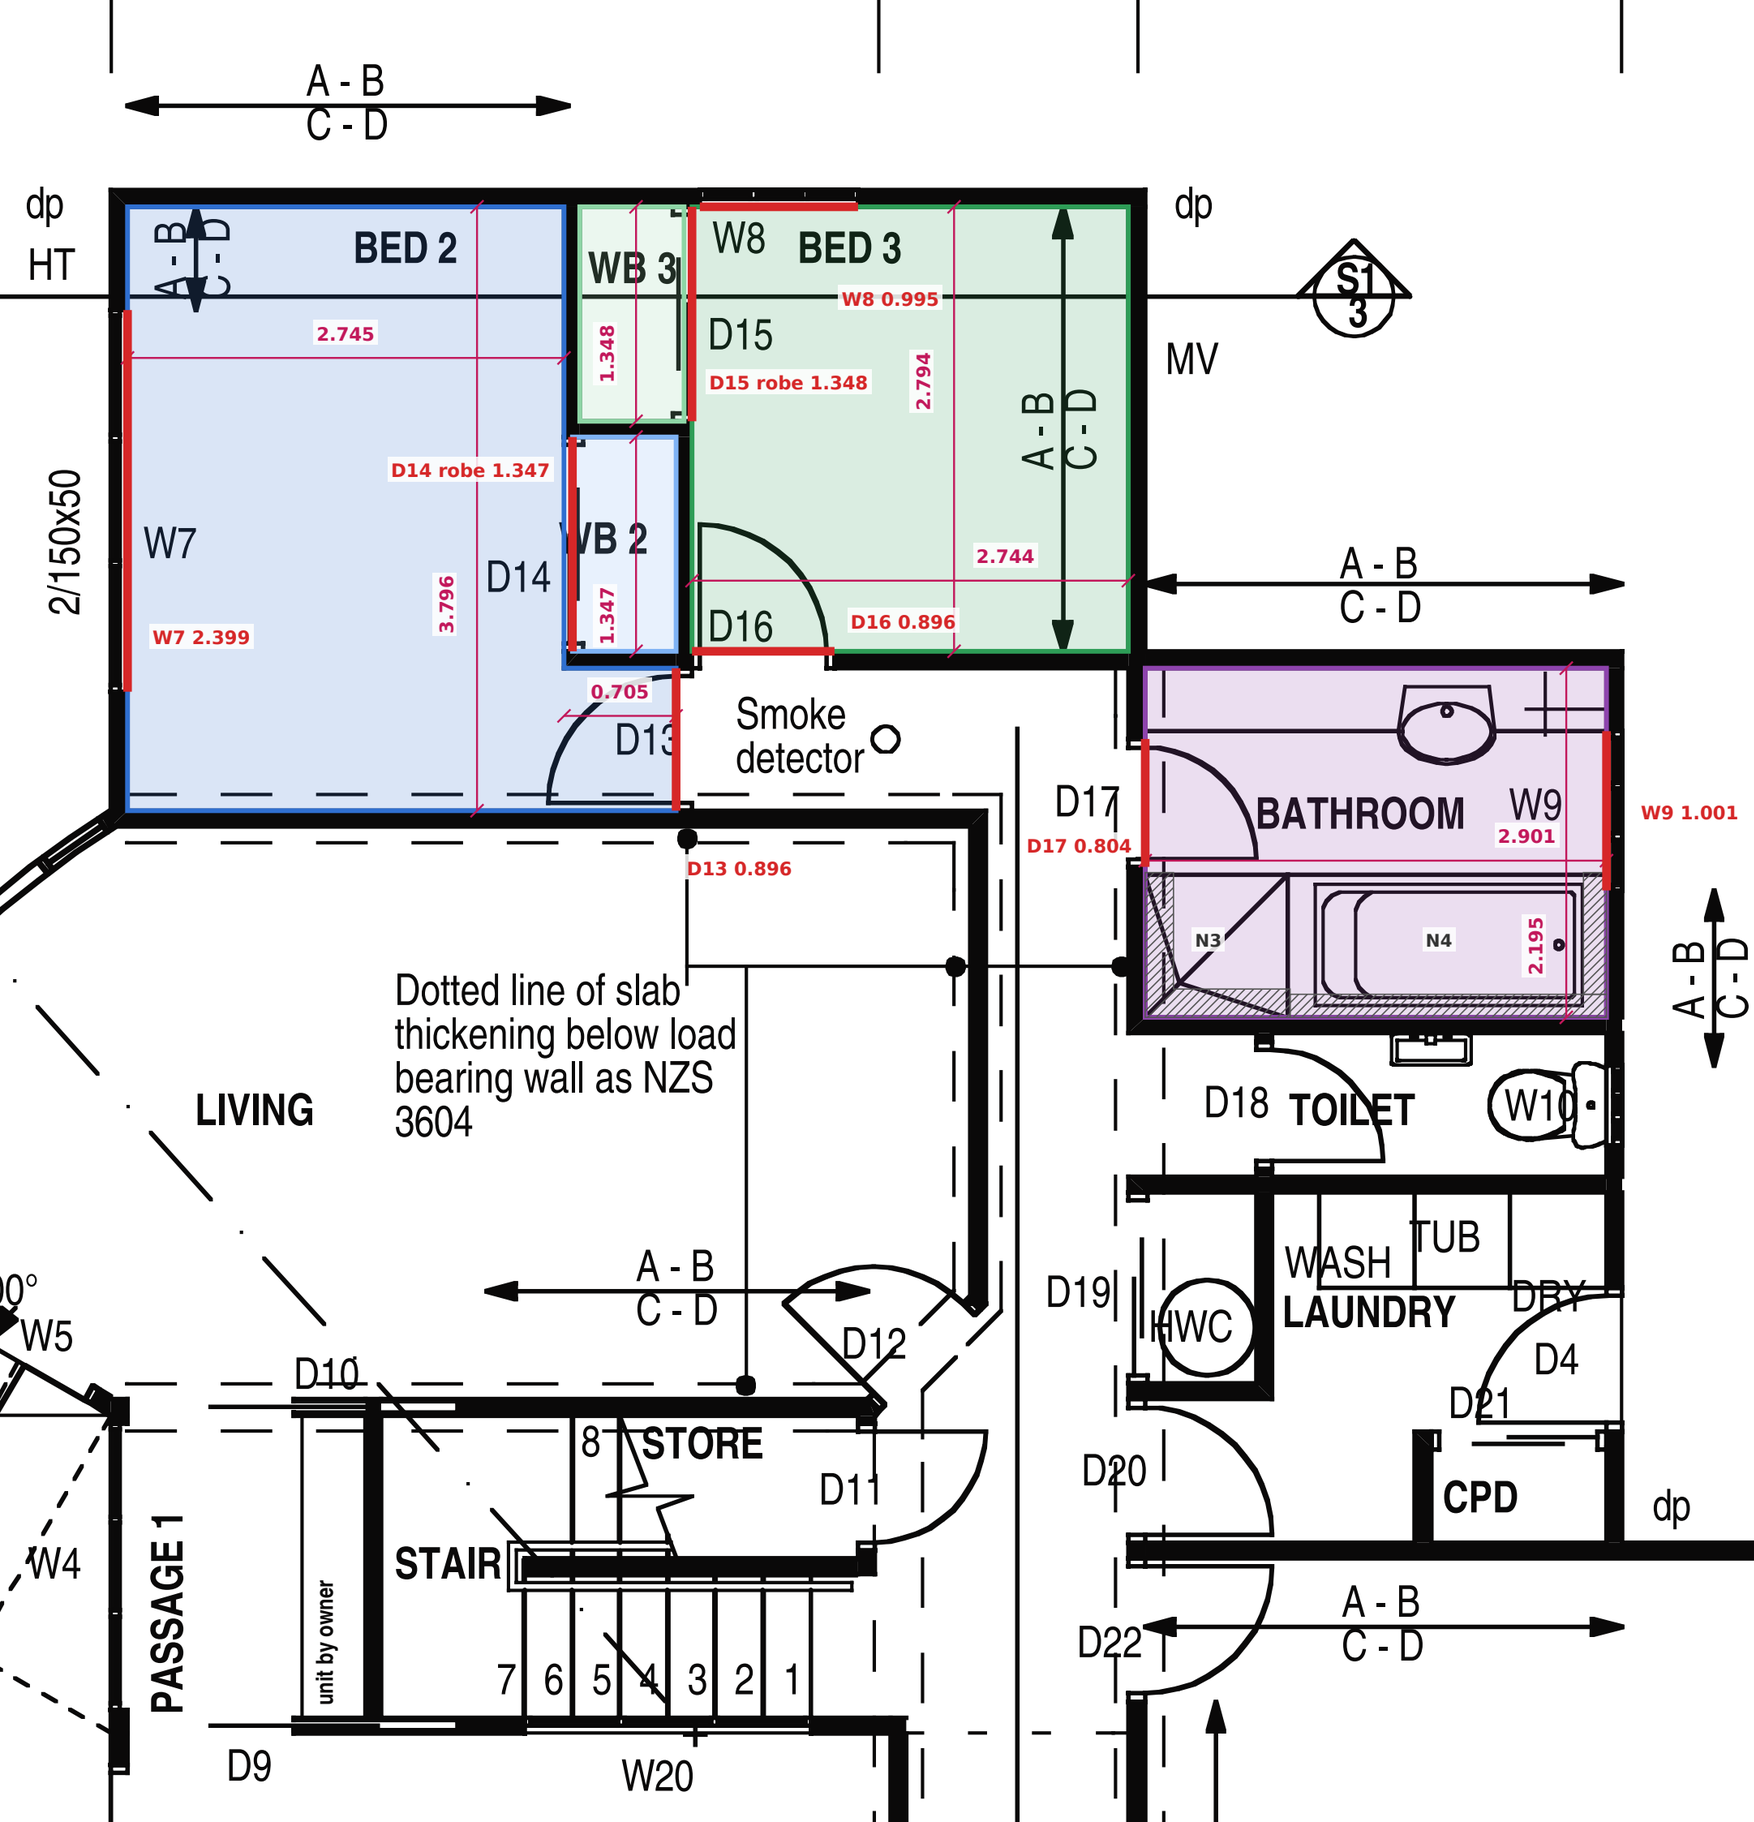

SAMPLE PAINTING TAKEOFF

Ground floor bedroom wing - interior

Proposed new dwelling, 22 ABC Street

Source: A02 Rev A Ground Floor Plan 1:100

(MBIE consent guide, public sample, p.27)

Scale calibrated on overall dims 7,900 + 12,200

Prepared by Sergei G., QS - 01 Nov 2026

LEGEND

- Room measured: floor/ceiling area, outline = painted wall faces
- Opening deducted (> 0.5 m²), width in m
- Not painted (see Excel "Not Painted")
- Scaled dimension, m

BY ROOM	Ceiling m²	Walls net m²	Skirting lm
Bed 2	11.05	27.42	12.25
WB2 robe	0.88	6.90	2.65
Bed 3	7.67	20.90	8.83
WB3 robe	0.88	6.92	2.66
Bathroom	6.37	16.82	-

TOTALS (sample scope)

Walls, net	**78.96 m²**
Ceilings	**26.85 m²**
Doors (per leaf, both faces)	**3 leaves**
Door jamb linings	**14.60 lm**
Architraves (both sides)	**29.19 lm**
Skirtings	**26.39 lm**
Window reveals	**15.19 lm**
Robe opening linings + archs	**21.39 lm**

HEIGHTS ARE ASSUMED

Stud 2.40 m, doors 2.00 m, windows W7/W8 1.20 m, W9 0.80 m. No section/elevation for this house: sheets A01 / A05 / Section belong to other jobs.

Change one yellow cell in the Excel - all updates.

Questions Q1-Q8 in the Excel.

N3 shower lining to 2.0 m and N4 wall behind bath below rim 0.55 m are not painted.