


## ROOF FRAMING PLAN

1:100

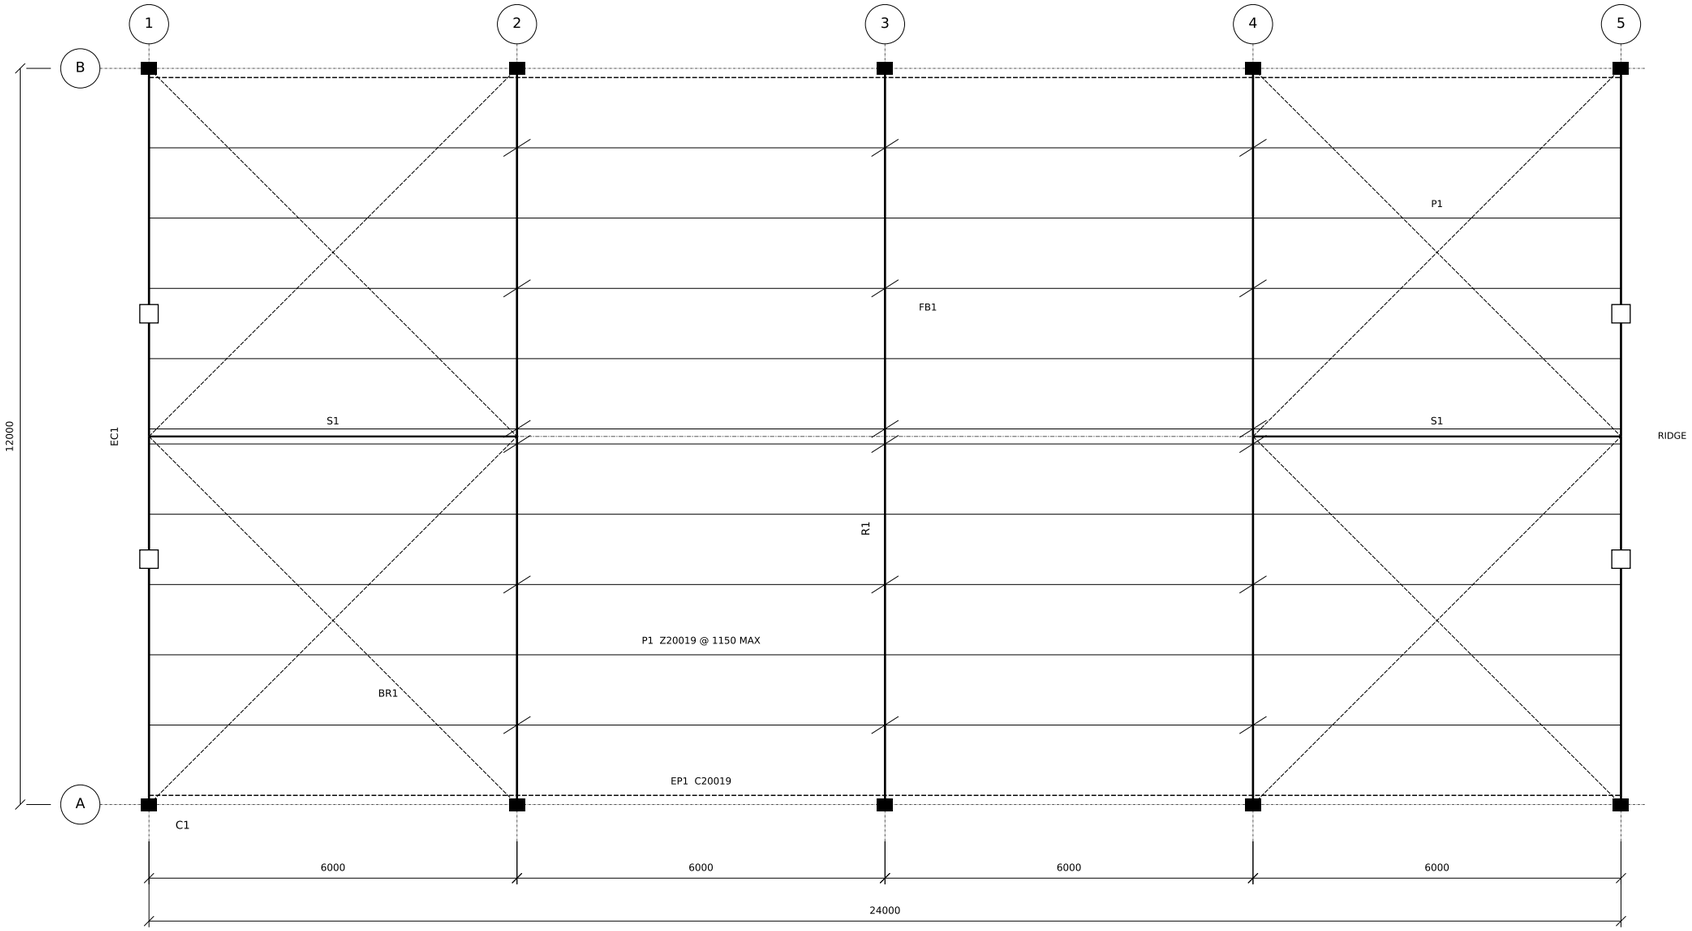


## SIDE WALL ELEVATION - GRID A (GRID B SIMILAR, BR2 x 4 PER WALL)

1:150




## TYPICAL PORTAL FRAME - GRIDS 2 TO 4

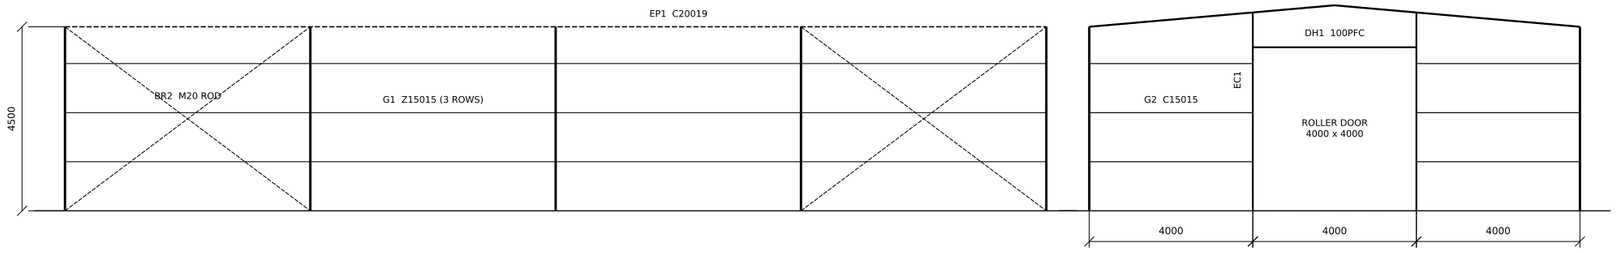1:150

## END WALL ELEVATION - GRID 1

1:150

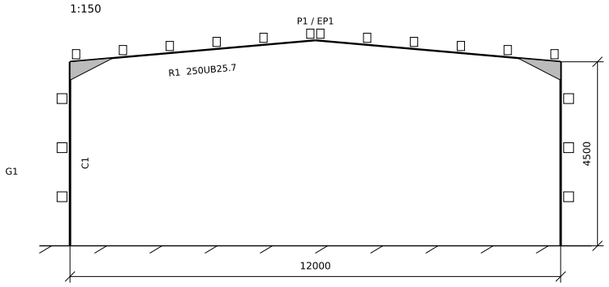


## END WALL ELEVATION - GRID 5

1:150

## MEMBER SCHEDULE

| MARK | SECTION | DESCRIPTION |
|---|---|---|
| C1 | 250UB31.4 | Portal column, grids A & B |
| R1 | 250UB25.7 | Portal rafter, eave to ridge |
| EC1 | 150x150x5.0 SHS | End wall column, grids 1 & 5 |
| DH1 | 100PFC | Roller door head, grid 1 |
| PJ1 | 89x89x3.5 SHS | Personnel door jamb, grid 5 |
| PH1 | 89x89x3.5 SHS | Personnel door head, grid 5 |
| P1 | Z20019 | Roof purlin, 6 rows each side |
| EP1 | C20019 | Eave purlin, simple span |
| G1 | Z15015 | Side wall girt, 3 rows each wall |
| G2 | C15015 | End wall girt, between columns |
| BR1 | M16 ROD | Roof cross bracing, end bays |
| BR2 | M20 ROD | Side wall cross bracing, end bays |
| S1 | 89x89x3.5 SHS | Ridge strut, braced bays |
| FB1 | 50x50x5 EA | Rafter fly brace |
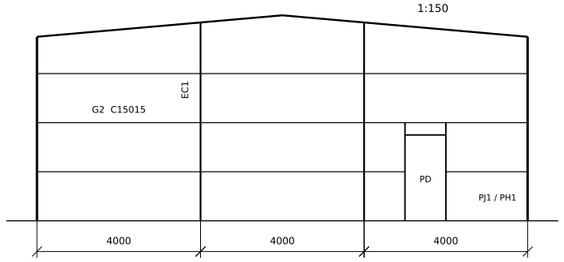
### GENERAL NOTES

1. Steel grade 300PLUS U.N.O., hollow sections C450L0.
2. Roof pitch 5 deg, eave height 4500 above FFL.
3. Purlins Z20019 lapped 15% of span at frames.
4. Rod bracing with turnbuckles, end bays.
5. Portfolio sample - not for construction.

| | |
|---|---|
| PROJECT | **RURAL MACHINERY SHED 24 x 12 m** |
| | **PORTFOLIO SAMPLE** |
| SHEET | FRAMING PLAN, SECTION AND ELEVATIONS |
| PREPARED | SERGEI GRISHUTOV - QUANTITY SURVEYOR |
| SCALE | AS SHOWN @ A3 |
| DATE | NOV 2026 |

**NOT FOR CONSTRUCTION**

REV A

**S1**