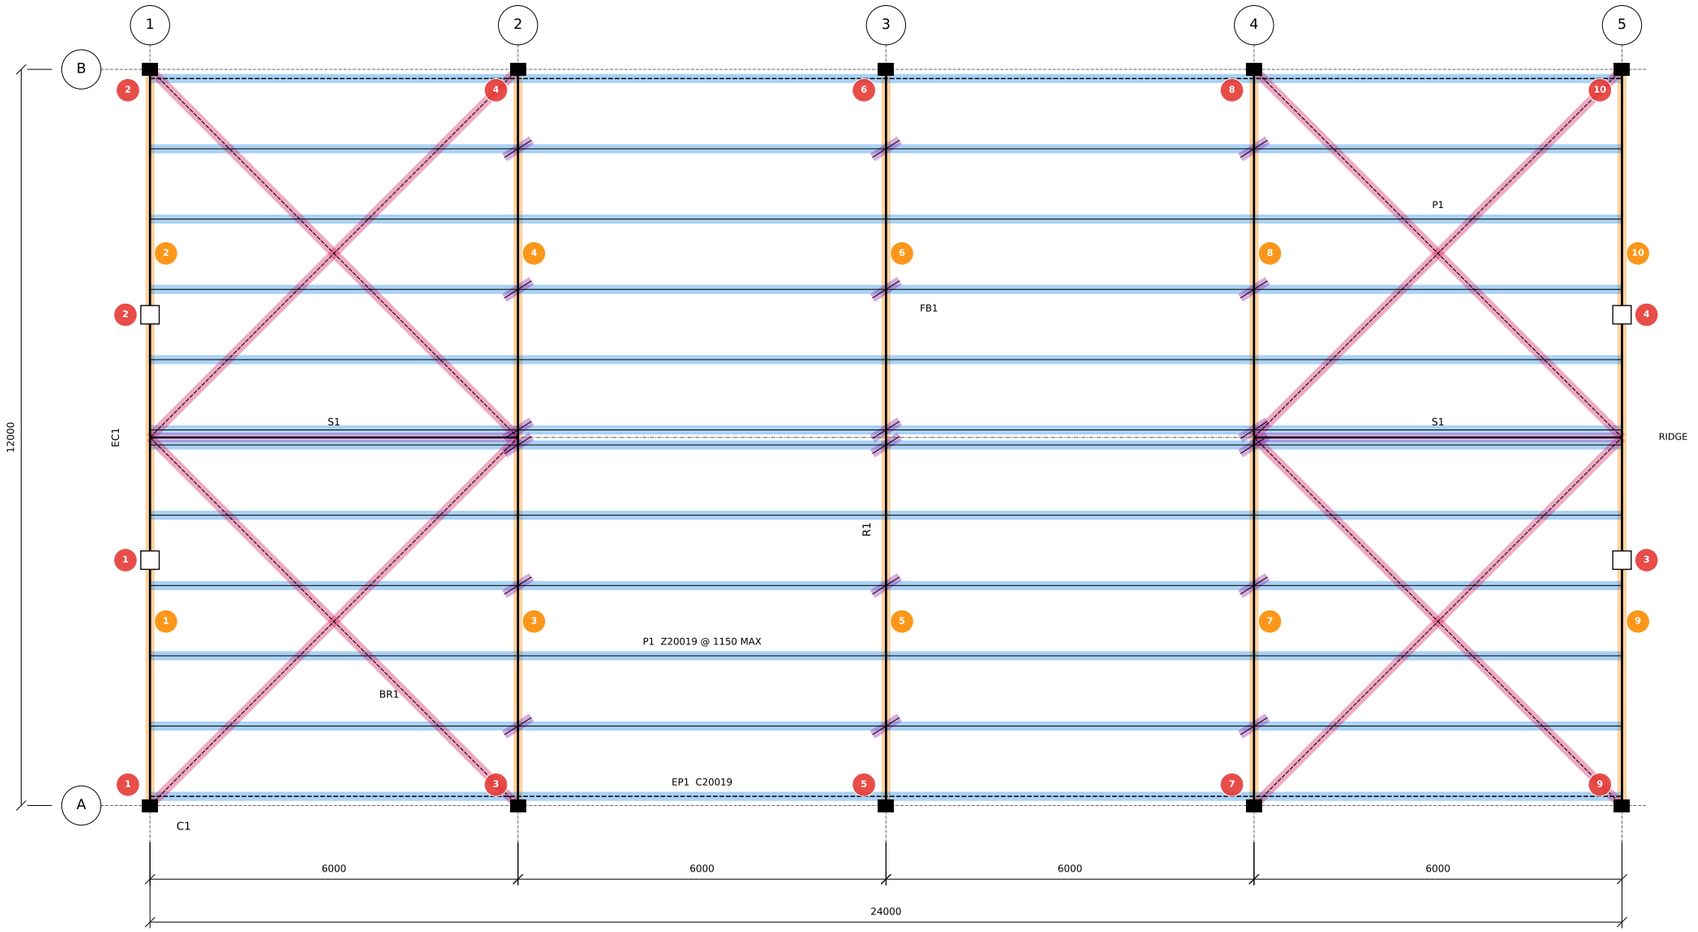

ROOF FRAMING PLAN

1:100

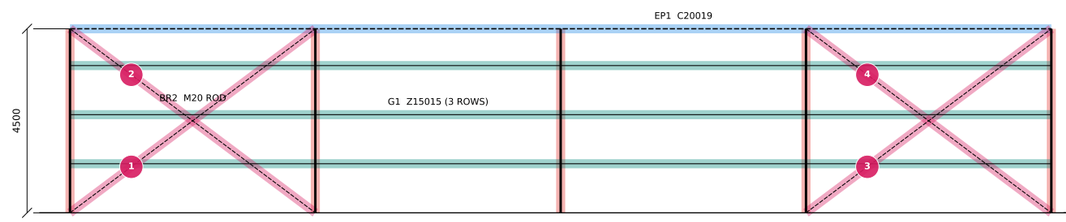

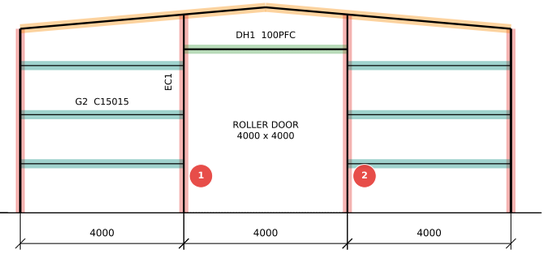

SIDE WALL ELEVATION - GRID A (GRID B SIMILAR, BR2 x 4 PER WALL)

1:150

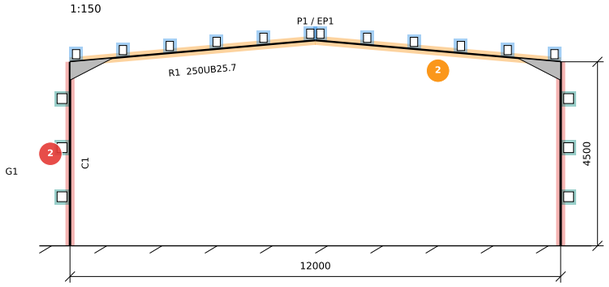

END WALL ELEVATION - GRID 1

1:150

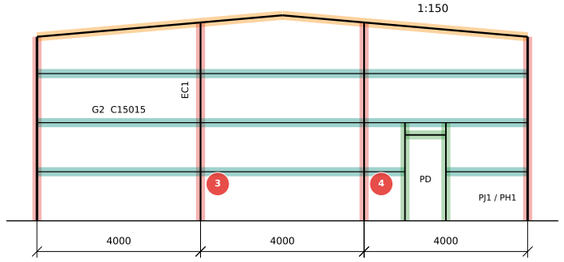

TYPICAL PORTAL FRAME - GRIDS 2 TO 4

1:150

END WALL ELEVATION - GRID 5

1:150

TAKEOFF LEGEND

MARK	SECTION	DESCRIPTION	QTY	TOTAL m
C1	250UB31.4	Portal column, grids A & B	10	45.0
R1	250UB25.7	Portal rafter, eave to ridge	10	60.2
EC1	150x150x5.0 SHS	End wall column, grids 1 & 5	4	19.4
DH1	100PFC	Roller door head, grid 1	1	4.0
PJ1	89x89x3.5 SHS	Personnel door jamb, grid 5	2	4.8
PH1	89x89x3.5 SHS	Personnel door head, grid 5	1	1.0
P1	Z20019	Roof purlin, 6 rows each side	12	320.4
EP1	C20019	Eave purlin, simple span	8	48.0
G1	Z15015	Side wall girt, 3 rows each wall	6	160.2
G2	C15015	End wall girt, between columns	15	60.0
BR1	M16 ROD	Roof cross bracing, end bays	8	68.0
BR2	M20 ROD	Side wall cross bracing, end bays	8	60.0
S1	89x89x3.5 SHS	Ridge strut, braced bays	2	12.0
FB1	50x50x5 EA	Rafter fly brace	36	32.4

MEASUREMENT NOTES

1. Lengths centre-line, grid to grid.
2. Purlins/girts: 24.0 m + 3 laps x 0.9 m.
3. Plates, bolts, cleats, bridging excluded.
4. Counts shown in coloured tags.
5. Full quantities: Steel_BoM_Machinery_Shed.xlsx

PROJECT	**RURAL MACHINERY SHED 24 x 12 m**
	PORTFOLIO SAMPLE
SHEET	FRAMING PLAN, SECTION AND ELEVATIONS
PREPARED	SERGEI GRISHUTOV - QUANTITY SURVEYOR
SCALE	AS SHOWN @ A3
DATE	NOV 2026

TAKEOFF MARKUP

REV A

S1-M